



KNEE OPERATED HANDBASIN INSTALLATION INSTRUCTIONS

SINK CODE: KB

Congratulations!

You have just purchased one of the premium products from Brayco's sink range.

This basin comes supplied with:


- Tempering valve
- 2 x polyamide braided hoses
- Basin waste drainer
- Basin spout
- Push button valve
- Brackets & screws

Important information

Please follow the below procedures. If these are not followed it can impact the life of some components and void warranties.

This Knee Operated Handbasin must be installed by a qualified plumber.

- All pipework must be thoroughly flushed to remove any debris prior to installation as foreign materials may cause damage to internal parts and affect performance.
- This product will not function if the water pressure is too great. Recommended pressure is 350kpa with a maximum no greater than 500kpa. If the pressure is greater than 500kpa a pressure reductive valve must be fitted.

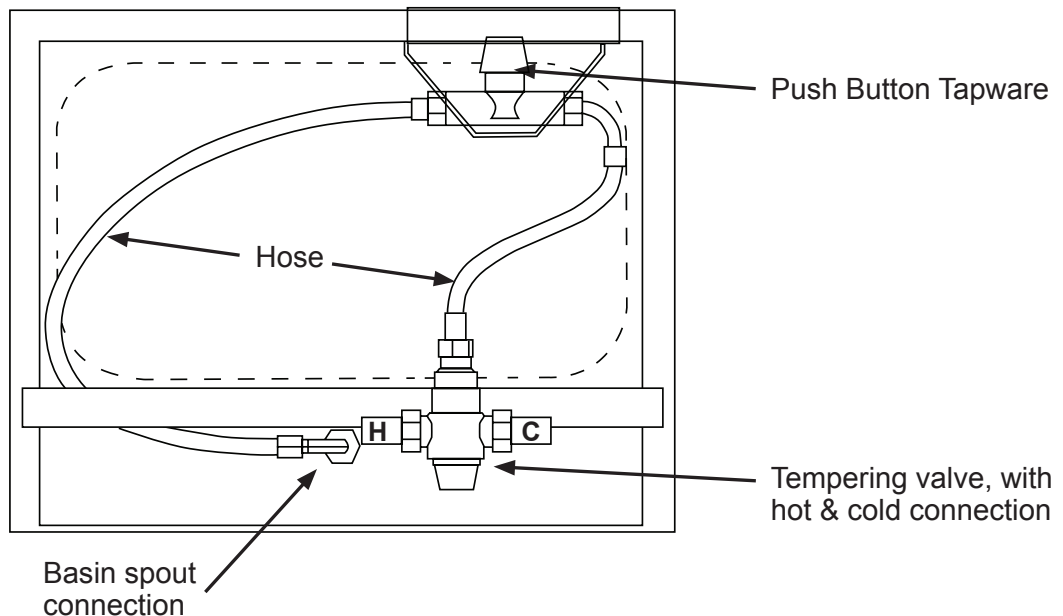

TROUBLE SHOOTING

Inconsistent flow or no water flow

Check the filters on the inlets of the temperature valve. If it is a new works, silt from the pipes can collect and block or restrict the flow.

The temperature valve will only work if both the hot and cold water supply are connected and both turned on fully.

Continuous water flow

Valves only operate in one direction, this is clearly marked on the valve with an arrow. If the main water supply is not connected correctly then this will cause the water to consistently flow.

Valve guard is hard to operate or there is continuous flow

The mains pressure may be too great, the recommended pressure is 350kpa with a maximum of 500kpa.

For more information please contact your nearest Brayco Branch

AUSTRALIA
1300 272 926
customer@brayco.com.au
Brayco.com.au

NEW ZEALAND
09 271 5000
sales@braycostainless.co.nz
Braycostainless.co.nz

